

LA 6S-TU

Device information	LA 6S-TU
Design	
- Heat source	Outside air
- Model	Universal design reversible
- Thermal energy metering	Integrated
- Installation location	Outdoors
- Performance levels	1
Operating limits	
- Min. return temperature / Max. flow temperature ⁷⁾	18 / 60 °C +/- 2
- Lower operating limit heat source (heating operation) / Upper operating limit heat source (heating operation)	-22 / 35 °C
Flow / sound	
- Max. heating water flow rate / Pressure drop	1,15 m ³ /h / 12000 Pa
- Heating water flow rate (A7W45) / Pressure drop (A7W45)	1,08 m ³ /h / 10600 Pa
- Heating water flow rate (A7W55) / Pressure drop (A7W55)	0,66 m ³ /h / 4000 Pa
- Minimum heating water flow rate / Pressure drop	0,66 m ³ /h / 4000 Pa
- Heat source flow (min.)	2700 m ³ /h
- Sound power level	56 dB (A)
- Sound power level in accordance with EN 12012 (lowered operation)	52 dB (A)
- Sound pressure level in 10 m ²)	28 dB (A)
- Sound pressure level in 10 m (lowered operation) ²⁾	24 dB (A)
Dimensions/weight and filling quantities	
- Weight	185 kg
- Thread type, heating connection / Connection heating	G / 1 inch
- Refrigerant / Amount of refrigerant	R410A / 3,4 kg
- Oil type / Oil quantity	Polyolester (POE) / 0,7 l
- Water content	1,9 l
Electrical connection	
- Rated voltage / Fuse protection	3/N/PE ~400 V, 50 Hz / C 10 A
- Control voltage / Control voltage fuse protection	1/N/PE ~230 V, 50 Hz / 4 AT
- Degree of protection	IP 24
- Initial current limiter	No
- Starting current	28 A
- Rotary field monitoring	No
- Nominal power consumption A7/W35 / Maximum electric power consumption ¹⁾	1,4 / 2,93 kW
- Nominal current at A7/W35 / cos phi	2,88 A / 0,8
- Power consumption of the fan	125 W
Additional model features	
- Type of defrosting	Reverse circulation
- Water in device protected against freezing ⁴⁾	Yes

Glen Dimplex Thermal Solutions T: + 49 9221 709-100
 (Glen Dimplex Deutschland GmbH) F: + 49 9221 709-339
 Am Goldenen Feld 18 dimplex@dimplex.de
 D-95326 Kulmbach www.dimplex.de

Glen Dimplex Austria GmbH T: + 43 6214 20330
 Hauptstraße 71 F: + 43 6214 203304
 A-5302 Henndorf am Wallersee info@dimplex.at
 www.dimplex.at

LA 6S-TU

Heat output / coefficient of performance (COP) according to EN 14511:1)

Heizen 1 Verdichter	W35	W45	W55
A-7	4.0 kW / 2.9	3.76 kW / 2.22	3.61 kW / 1.81
A2	5.1 kW / 3.8	4.84 kW / 2.84	4.66 kW / 2.25
A7	6.4 kW / 4.6	6.1 kW / 3.5	5.68 kW / 2.73
A10	6.7 kW / 4.7	6.3 kW / 3.62	6.0 kW / 2.83
A-20	2.38 kW / 1.79	2.28 kW / 1.44	
A-15	2.97 kW / 2.20	2.83 kW / 1.75	
A12	7.00 kW / 4.93	6.40 kW / 3.66	6.20 kW / 2.91
A20	8.04 kW / 5.66	7.67 kW / 4.41	7.29 kW / 3.41

Heizen 2 Verdichter	W35
A-7	4.0 kW / 2.9
A2	5.1 kW / 3.8

Note:

1) This data indicates the size and capacity of the system according to EN 14511. For an analysis of the economic and energy efficiency of the system, the bivalence point and regulation should be taken into consideration. These specifications can only be achieved with clean heat exchangers. Information on maintenance, commissioning and operation can be found in the respective sections of the installation and operating instructions. The specified values have the following meaning, e.g. A7 / W35: Heat source temperature 7 °C and heating water flow temperature 35 °C.

2) The specified sound pressure level corresponds to the operating noise of the heat pump in heating operation with a flow temperature of 35°C. The specified sound pressure level represents the free sound area level. The measured value can deviate by up to 16 dB(A), depending on the installation location.

4) The heat circulating pump and the heat pump manager must always be ready for operation.


7) Depending on the heat pump type and refrigerant used, the maximum flow temperatures in heating operation may be reduced when the outside temperature falls. Further information can be found in the operating limit diagram for the heat pump. If the supporting feet are used, the level can increase by up to 3 dB (A).

Glen Dimplex Thermal Solutions T: + 49 9221 709-100
(Glen Dimplex Deutschland GmbH) F: + 49 9221 709-339
Am Goldenen Feld 18 dimplex@dimplex.de
D-95326 Kulmbach www.dimplex.de

Glen Dimplex Austria GmbH T: + 43 6214 20330
Hauptstraße 71 F: + 43 6214 203304
A-5302 Henndorf am Wallersee info@dimplex.at
www.dimplex.at

LA 6S-TU

Heating water temperature [°C]

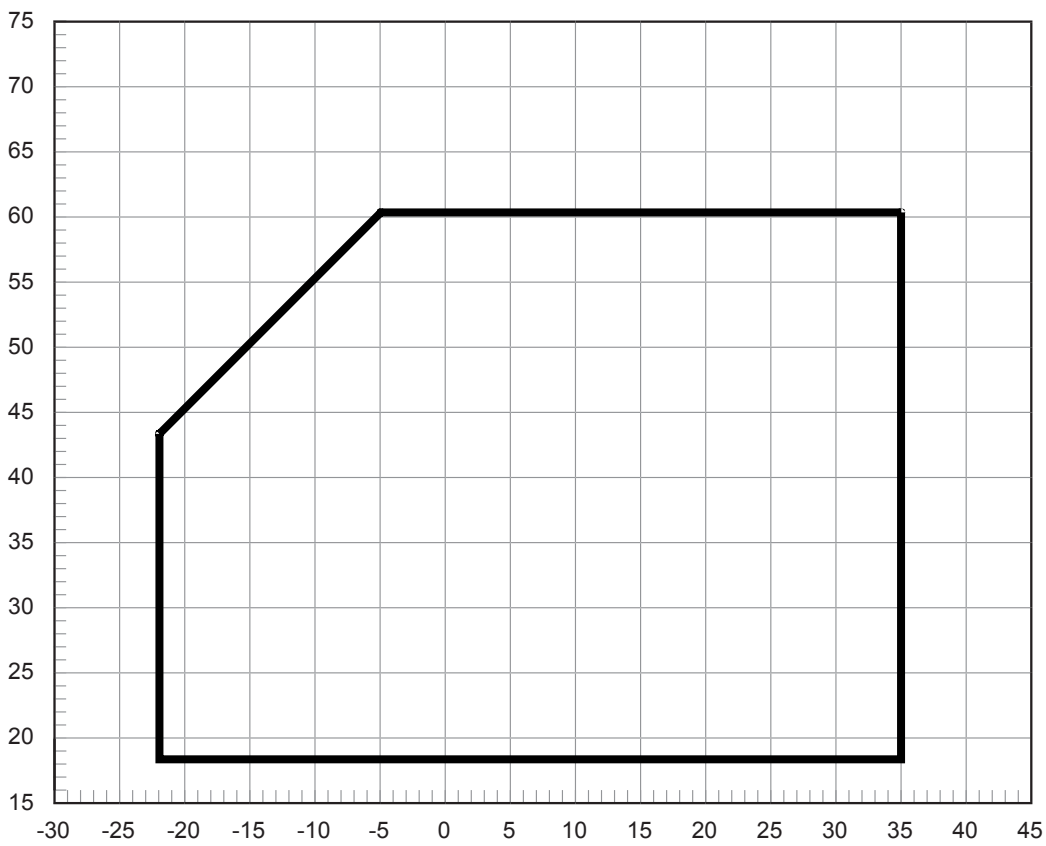

Heat source inlet temperature [°C]

Note:
The maximum possible flow temperature and the operating limits vary by +/- 2K due to component tolerances.
The minimum volume flow specified in the device information must be ensured at the lower operating limit.
In mono energy operating mode with the heating element activated, the maximum flow temperature increases by approximately 3K.

Glen Dimplex Thermal Solutions T: + 49 9221 709-100
(Glen Dimplex Deutschland GmbH) F: + 49 9221 709-339
Am Goldenen Feld 18 dimplex@dimplex.de
D-95326 Kulmbach www.dimplex.de

Glen Dimplex Austria GmbH T: + 43 6214 20330
Hauptstraße 71 F: + 43 6214 203304
A-5302 Henndorf am Wallersee info@dimplex.at
www.dimplex.at